

TRAVELING AXLE SERIES



3548TA / 3553TA
5048TA / 5053TA



TA SERIES



Heavy-duty planetary winch, standard with Talbert, is operated by a wireless remote control, delivering maximum pulling power.




Solid steel I-beams on 9-inch centers provide the framework for the rugged Talbert TA Series.



Tie-down chain slots, located on the center and perimeter of deck, secure loads of varying dimensions, allowing for quick and easy transport.

TA SERIES

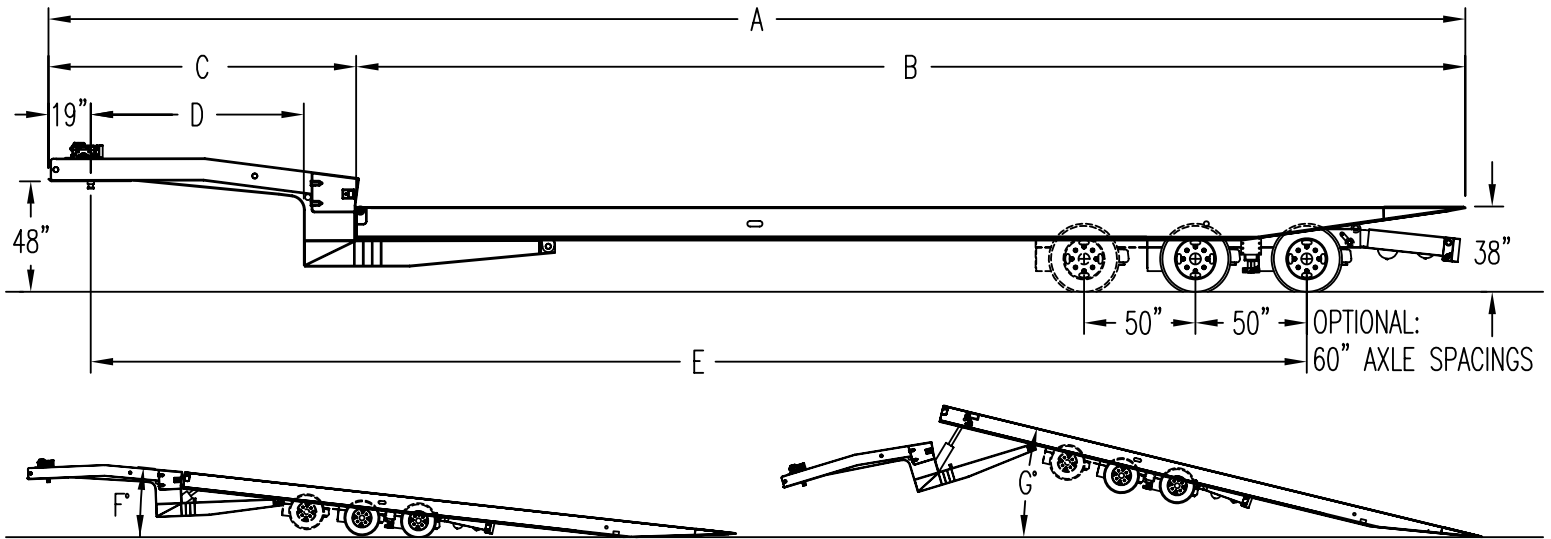

- T-1 & 80k, Beam Construction
- 15,000 lb. Planetary Winch With Cable And Shackle - (20,000 lb. Optional)
- Wet Line Operation Standard (Gas Power Pack Optional)
- Lockable Tool Box In Gooseneck, Curb Side
- Two Speed Landing Gear
- 8 ft. 6 in. Wide
- 4 in. I-Beam Cross Members On 9 in. Centers
- 1-1/2 in. Apitong Flooring
- Tie Down Slots On Sides And Center
- Two Function Wireless Remote For Winch Operation
- 12-1/4 in. x 7-1/2 in. - 2S1M ABS Air Brakes
- Hub Piloted Steel Disc Wheels
- Tires: 235/75R17.5 (H)
- Air Ride Suspension
- Triple Reinforced Approach Plate
- 7 Way Plug With L.E.D. Lights
- Talbert Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

	3548TA	5048TA	3553TA	5053TA
A = O/A Length	48 ft. 0 in.	48 ft. 0 in.	53 ft. 0 in.	53 ft. 0 in.
B = Lower Deck	37 ft. 4 in.	37 ft. 4 in.	41 ft. 6 in.	41 ft. 6 in.
C = Upper Deck	10 ft. 8 in.	10 ft. 8 in.	11 ft. 6 in.	11 ft. 6 in.
D = Swing Radius	86 in.	86 in.	96 in.	96 in.
E = Axle Setting	40 ft. 6 in.	40 ft. 6 in.	45 ft. 6 in.	45 ft. 6 in.
F = Load Angle	7 Degrees	8 Degrees	6 Degrees	6 Degrees
G = Dump Angle	15 Degrees	15 Degrees	14 Degrees	14 Degrees
No. of Axles	2	3	2	3
Capacity	70K Dist/50K In 10 ft.	100K Dist/80K In 10 ft.	70K Dist/50K In 10 ft.	100K Dist/80K In 10 ft.
Estimated Weight	18,420 lbs.	21,080 lbs.	19,480 lbs.	22,140 lbs.



Pictured with optional accessories: Spare tire carrier, outriggers, D-rings & steel flooring.

Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0312-4k PUB 230B