
## **EXTENDABLE SERIES**



35-55 TON MODELS



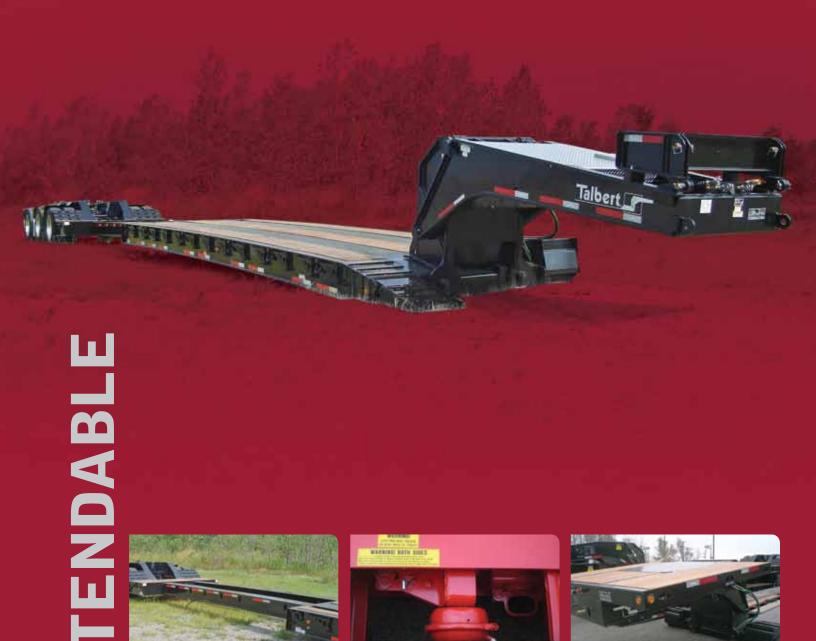

Increased camber as deck opens due to extensive deck length, offering greater hauling capabilities.




Air locks offer additional security and safety of the load.




Multiple gooseneck options mechanical, hydraulic or fixed customize your hauling needs.

## **EXTENDABLE**

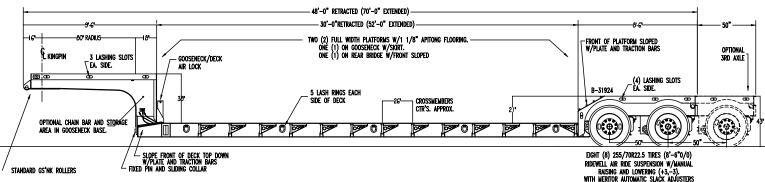

- Mechanical Removable Gooseneck
- 80 in. Swing Radius (96 in. Optional)
- Fixed Pin And Sliding Collar
- Front Folding Ramps (Optional)
- 48 ft.-0 in. Overall Closed (As A Tandem)
- 12 in. Swing/Removable Outriggers
- 8 ft.-6 in. Wide Deck And Rear Bridge
- 22 in. Loaded Deck Height
- 8 in. Loaded Road Clearance
- High Strength 100,000 lb. Minimum Yield Steel
- Axles: 25,000 lb. Capacity

- Suspension: Air Ride
- Tires: 255/70R22.5 (H)
- · Wheels: Steel Disc Hub Piloted, Outboard Mounting
- Optional 3rd Axle Available
- Platforms On Gooseneck And Rear Bridge
- Front Bridge Ramp
- Cambered Telescopic Beams
- Spring Parking Brake On One Axle
- Anti Lock Brake System
- Talbert Red Or Black Paint



Various Options Available Upon Request. Specifications Subject To Change Without Notice.





Dealer:			