

SPREAD AXLE LOWBOY SERIES



55SA-HX



55SA-HX



A low-pressure hydraulic system ensures a support function, delivering maximum lifting power.




Robust, four-cylinder hydraulic removable gooseneck maximizes lift capacity and load height.



Best in class lift capacity of any trailer on the market.

55SA-HX

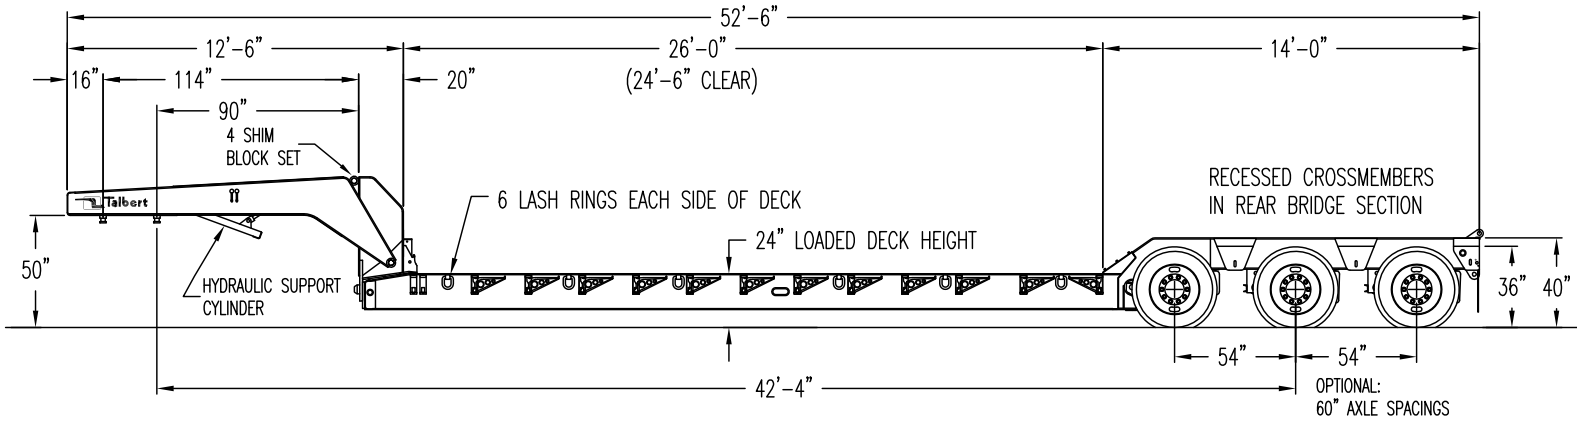

- Non-Ground Bearing Gooseneck Design
- 114/90 in. Dual Swing Radius
- Hydraulic Support Cylinder (Standard)
- Front Folding Ramps
- 26 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 24 in. Loaded Deck Height / 8 in. Loaded Road Clearance
- Auxiliary Cross Members
- Upper Flange Reinforcement
- 1/4 in. Plate Boom Well In Last 6 ft. Of Deck
- High Strength 100,000 P.S.I. Minimum Yield Steel
- Axles: 25,000 lb. Capacity
- Air Lift 3rd Axle
- Outrigger Boards
- Suspension: Air Ride With Automatic And Talbert +3/-3 Controls
- Manual Exhaust Valve
- Tires: 255/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted With Outboard Brake Drums
- Bolsters And Half Bolster On Rear Bridge
- 40 in. Mainbeam / 36 in. Bolster Height
- Boom Well In Rear Bridge
- Spring Parking Brake On Axle Two
- 4th Axle Capable With Or Without Axle Extension
- 12 Volt L.E.D. Sealed Light System
- Strobes And Battery Backup
- 110,000 lb. Capacity In 1/2 Deck Length
- 110,000 lb. In 16ft. When 3+1
- Estimated Weight: 21,660 lbs.
- Talbert Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Pictured with optional rear bridge fenders.

Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0312-4k PUB 234A