

SPREAD AXLE LOWBOY SERIES



55SA-LD



55SA-LD



The 55SA-LD's 24-inch flip gooseneck extension results in a 132-inch swing radius, which allows for greater load transfer capability.




Talbert's 55SA-LD allows users to run the with four axles close coupled or as a 3+1 spread-axle with the E1Nitro™.




At just 18 inches, the deck height on the 55SA-LD is two inches lower than Talbert's standard 55SA unit for greater load versatility.

55SA-LD

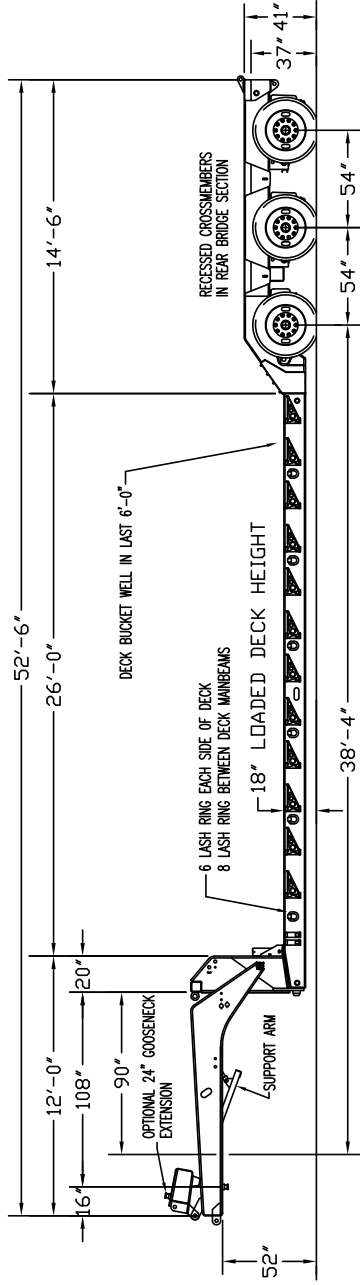

- Non-Ground Bearing Gooseneck Design
- 108 in. Swing Radius w/ Connections for 24 in. Gooseneck Extension
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- 26 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 18 in. Loaded Deck Height / 6 in. Loaded Road Clearance
- 1/4 in. Plate Bucket Well, Last 6 ft. of Deck
- High Strength 100,000 P.S.I. Minimum Yield Steel
- 2 in. Apitong Flooring
- Two Sections Chain Storage
- Axles: 25,000 lb. Capacity
- Suspension: Air Ride With Automatic and Talbert +3 in./-3 in. Manual Control
- Manual Exhaust Valve
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted With Outboard Brake Drums
- Bolsters And Half Bolster On Rear Bridge
- 41 in. Mainbeam / 37 in. Bolster Height
- Boom Well In Rear Bridge
- Spring Parking Brake On Axle Two
- 4th Axle And 3+1 E1NITRO™ Spread Capable
- 12 Volt L.E.D. Sealed Light System
- 110,000 lb. Capacity In 10' (4) Axle Close Coupled
- 110,000 lb. Capacity In 1/2 Deck Length in 3+1 Spread Axle Configuration
- 120,000 lb. Capacity In 1/2 Deck Length (4) Axle Close Coupled
- Estimated Weight: 23,850 lbs.
- Talbert Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

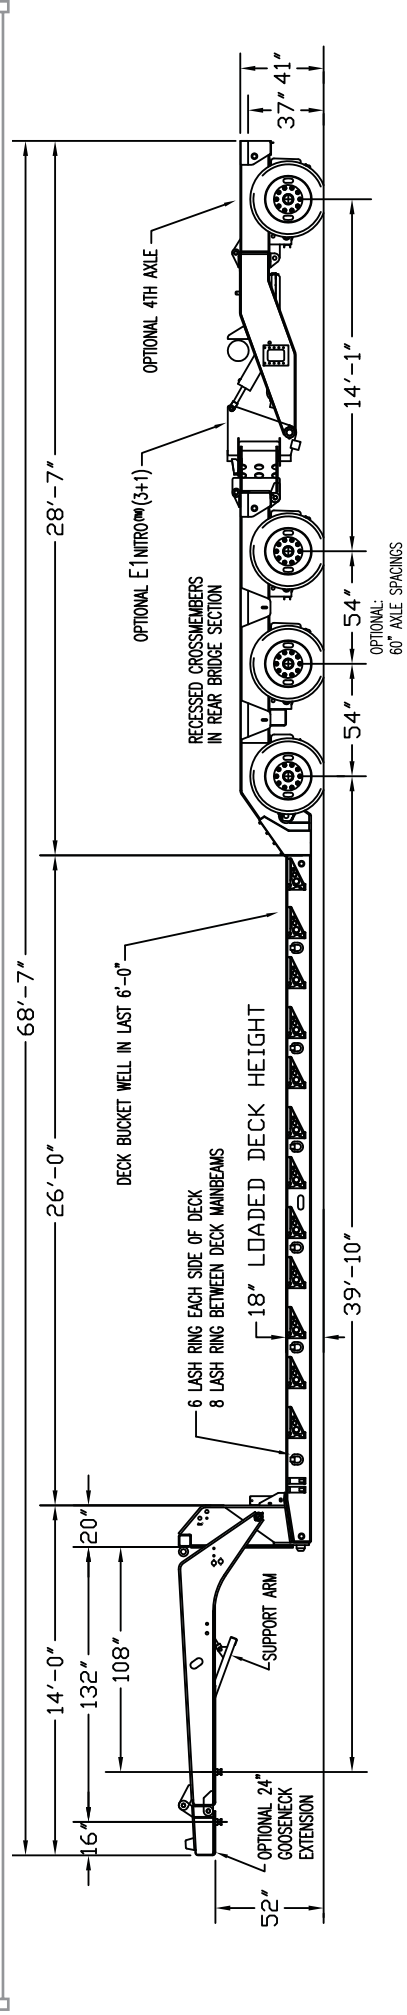

Dealer: