

SPREAD AXLE LOWBOY SERIES

Talbert[®]
SINCE 1938

55SA-RC



55SA-RC



A low-pressure hydraulic system ensures a support function, delivering maximum lifting power.




Robust, four-cylinder hydraulic removable gooseneck maximizes lift capacity and load height.



Best in class lift capacity of any trailer on the market.

55SA-RC

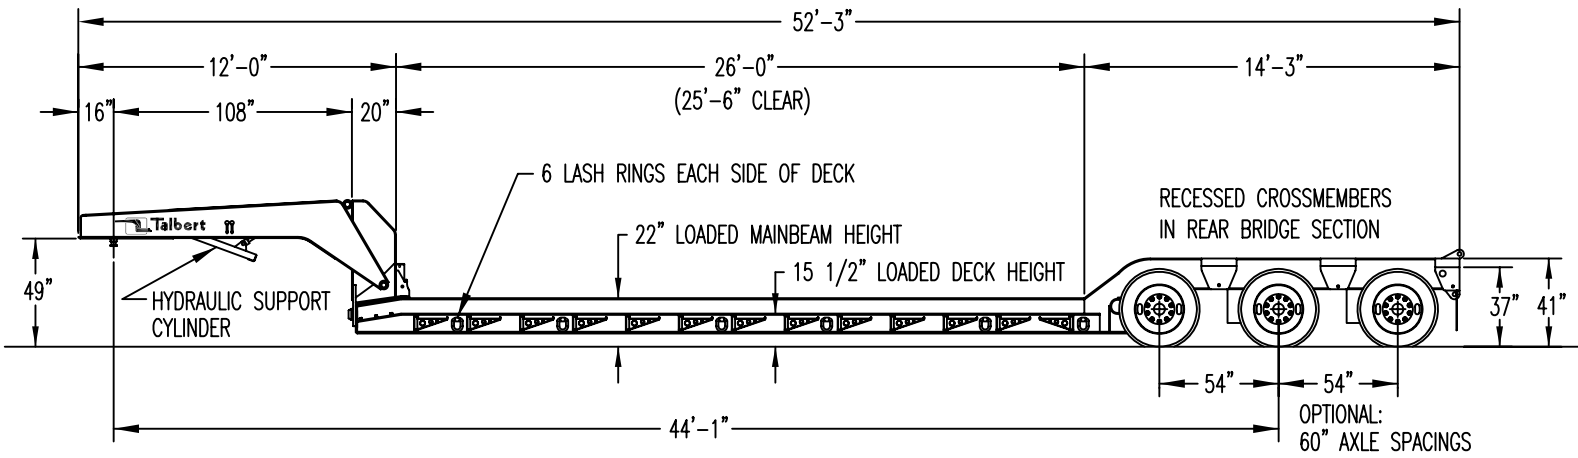

- Non-Ground Bearing Gooseneck Design
- 108 in. Swing Radius (Other Lengths Optional)
- Hydraulic Support Cylinder (Standard)
- Front Folding Ramps (Optional)
- 26 ft. 0 in. Deck Length (Other Lengths Optional)
- 12 in. Swinging Outriggers (Not Removable)
- 8 ft. 6 in. Wide Deck (48 in. Out To Mainbeam)
- 22- Mainbeams, 15-1/2- Loaded Side Height
- 6 in. Loaded Road Clearance
- 2 in. Apitong Flooring
- High Strength 100,000 P.S.I. Minimum Yield Steel
- Axles: 25,000 lb. Capacity
- Suspension: Air Ride With Automatic And Talbert +3/-3 Controls
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted With Outboard Brake Drums
- Bolsters And Half Bolster On Rear Bridge
- 41 in. Mainbeam / 37 in. Bolster Height
- Extra Deep Boom Well In Rear Bridge
- Spring Parking Brake On Axle Two
- 12 Volt L.E.D. Sealed Light System
- 4th Axle And 3+ 1 Spread Capable
- 110,000 lb. Capacity In 1/2 Deck Length
- Estimated Weight: 21,960 lbs.
- Talbert Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Dealer:

Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0312-4k PUB 221B